


## APU-9347-B02 Kiosk Printer

### APU-9347-B02 Kiosk Printer

The 3" APU-9347 kiosk printer, with the best-in-class CAP9000 direct thermal printer mechanism, provides an ideal solution for tackling rugged self-service applications. Rated for a minimum of 150 km total printing and at least 1,000,000 cuts, the APU-9347 does not quit. 10" diameter paper roll support means lower operating costs and an impressive 8"/second print speed and support for a range of paper thicknesses ensures rapid delivery of receipts, tickets, or labels – every time.

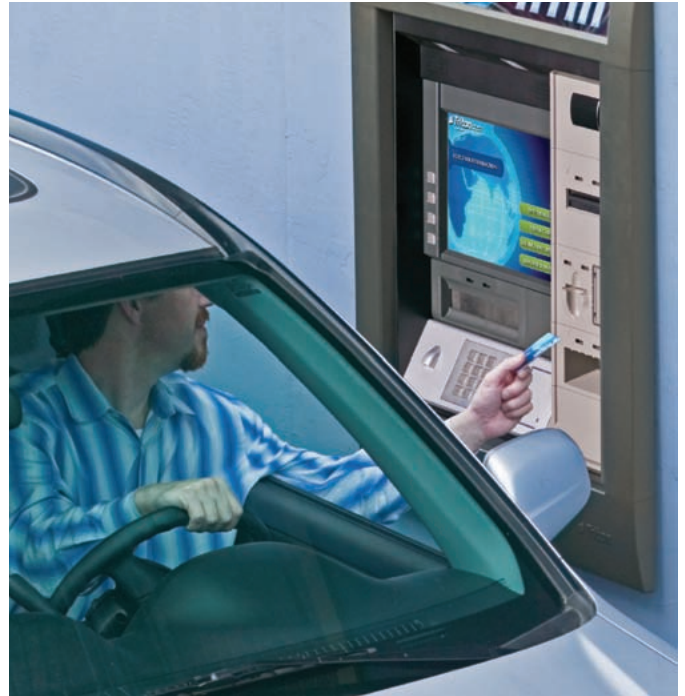

- Up to 200 mm/sec max print speed
- Minimum 150 km total printing
- Minimum 1,000,000 cuts
- Supports 10" diameter paper roll
- Choice of USB and Serial interfaces

### Product Specifications

Model	APU-9347-B02U	APU-9347-B02S
Printing	Method	
	Thermal line dot printing	
	Number of dots/line	
	604	
	Resolution(dots/mm)	
	8	
	Paper width (mm)	
	80 <sup>+0</sup> <sub>-1</sub>	
	Printing width (mm)	
	76	
Speed (max mm/sec)		
200		
Paper path		
Straight		
Character matrix (HxW dots)		
24 x 24, 24 x 12, 16 x 16, 16 x 8		
Character dimensions (HxW mm)		
3.0 x 3.0, 3.0 x 1.5, 2.0 x 2.0, 2.0 x 1.0		
Character Type	Optional Font, Downloaded Character, User-defined Character	
	Extend Graphics Character set, Katakana Character set, JIS 1&2 level Kanji	
Bar code	UPC-A/E, JAN(EAN)8/13, ITF, CODE39, CODABAR	
	CODE93, CODE128, EAN128, PDF417, Data Matrix, Maxi Code, QR Code	
Power supply (V)	21.6 to 26.4	
Interface	USB	Serial (RS-232C)
Input buffer	2048 bytes	
Command	ESC/POS conformity*	
Cutting	Method	
	Slide type	
Service Life	Cutting type	
	Partial cut / Full cut	
Service Life	Pulse activation (pulse)	
	150 million	
	Abrasion resistance (km)	
150**		
Life (cut)		
1,000,000		
Operating temperature (°C)	0 to 50	
Dimensions (WxDxH mm)	165.15x301.25x177.1***	
Mass (g)	Approx.5000	

\* ESC/POST™ : Registered trademark of SEIKO EPSON CORP.  
 \*\* Use recommended thermal papers. \*\*\* Excluding protrusion.